

SGC Technologies, Inc.

PRODUCT SPECIFICATION FOR INFORMATION


PRODUCT NAME: SBP-5R6-1950BP20B

PART NO: SBP-5R6-1950BP20B

구 분	SPEC
Center frequency	1950MHz
Bandwidth(BW)	Fo ±10 MHz
Insertion Loss	3 dB MAX
VSWR	1.4 dB MAX
Ripple in BW	0.5 dB MAX
Attenuation	50dB (@2020MHz) min
In/Out Impedance	50 ohm

NOTE: EQUIPMENT used :HP 8753E

DIMENSION:

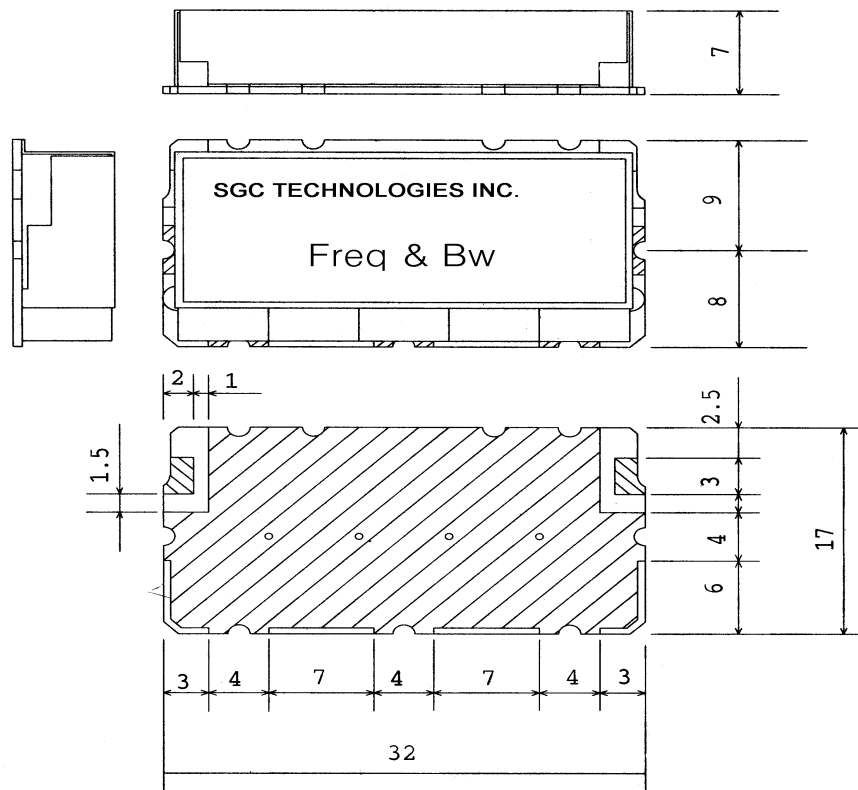


UNIT : mm
TOLERANCE UNLESS SPECIFIED : +/- 0.3

SBP-5R6-1950BP20B

3 May 2002 09:37:11


CH1 S₁₁ log MAG 5 dB/ REF 0 dB 1: -26.646 dB
 CH2 S₂₁ log MAG 10 dB/ REF 0 dB 1: -2.4279 dB

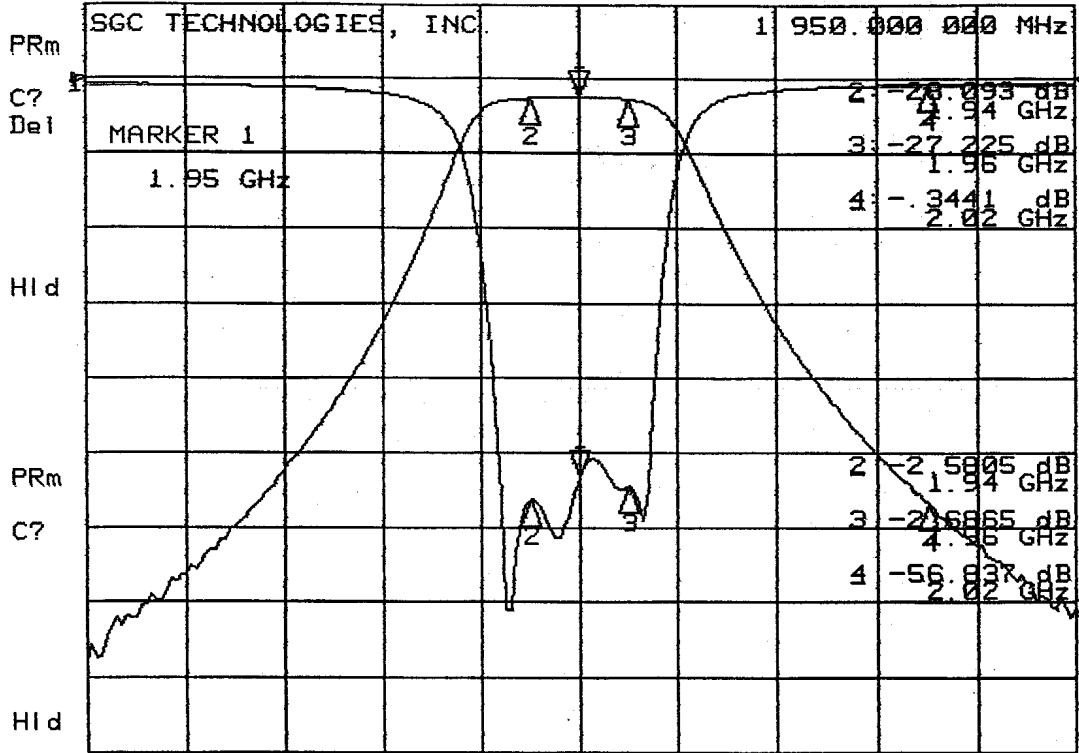

CENTER 1 950.000 000 MHz SPAN 200.000 000 MHz

3 May 2002 09:37:38

CH1 S₁₁ log MAG 5 dB/ REF 0 dB 1: 0 dB
 CH2 S₂₁ log MAG 10 dB/ REF 0 dB 1: 0 dB

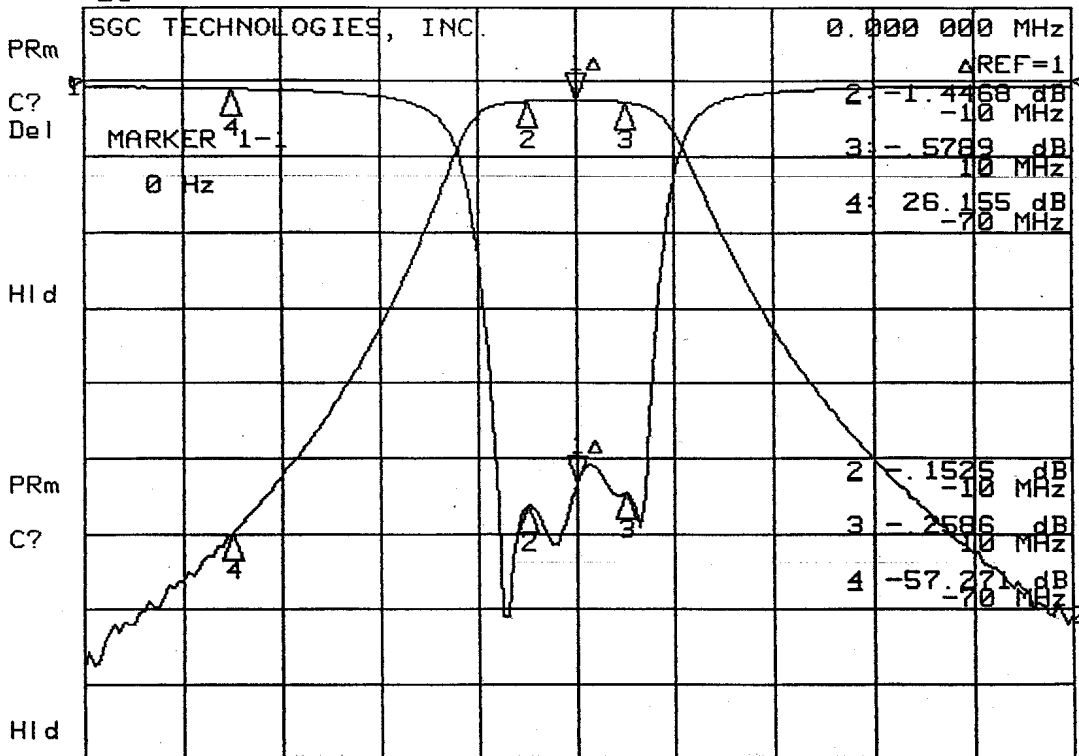

CENTER 1 950.000 000 MHz SPAN 200.000 000 MHz