

SGC Technologies, Inc.

PRODUCT SPECIFICATION FOR INFORMATION

CUSTOMER :

PART NO : SLH-445-HPD


PARAMETER	SPEC.
Cutoff frequency	445 MHz
Insertion loss	1.5 dB max
Ripple	1.0 dB max
V.S.W.R.	1.5 : 1
Attenuation	

NOTE:


EQUIPMENT used :HP 8753E

DIMENSION


TOP VIEW

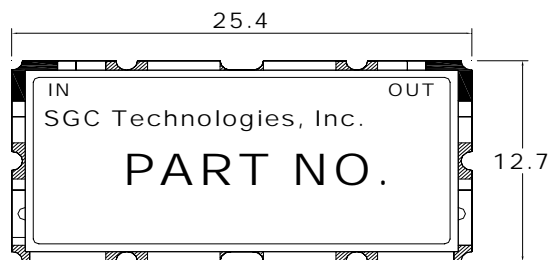

SIDE VIEW



BOTTOM VIEW

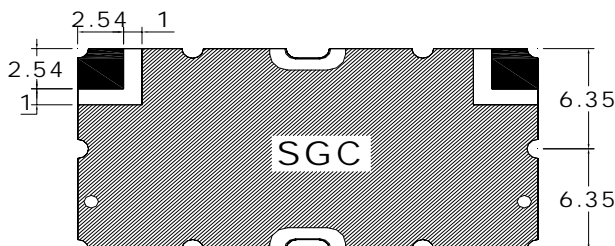


TOLERANCE UNLESS
OTHERWISE SPECIFIED : ± 0.3
DIMENSIONS : mm

 GROUND
 I/O PORT

SLH-445-HPD


5 Dec 2002 17:36:43

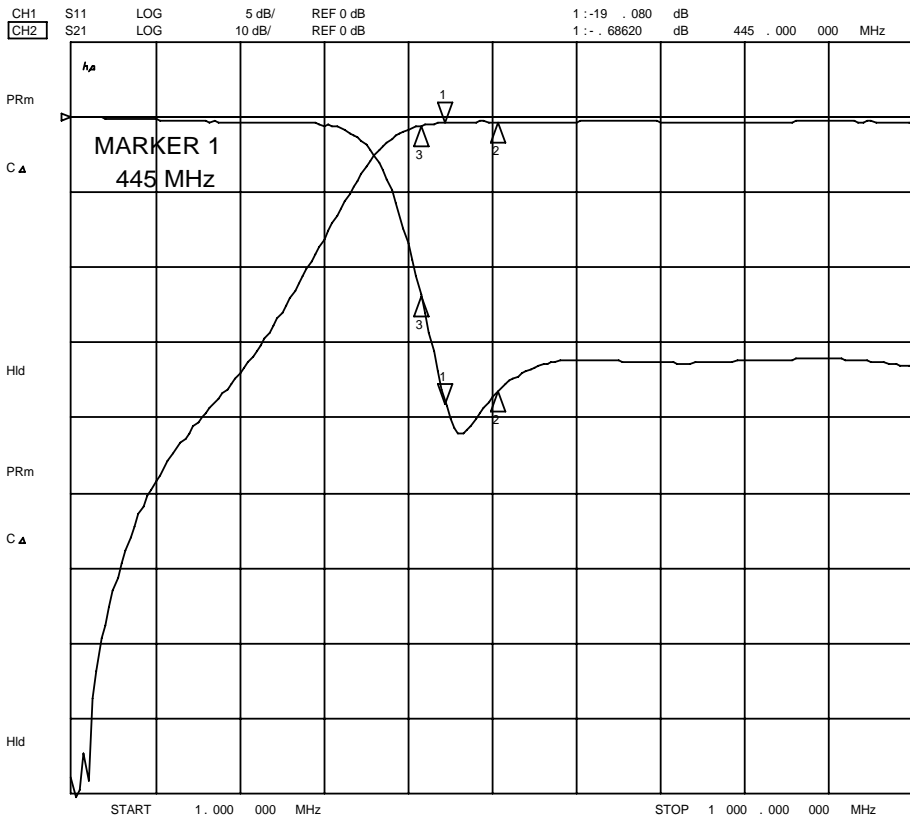

CH1 Markers
 2: -18.232 dB
 507.000 MHz
 3: -11.873 dB
 416.000 MHz

CH2 Markers
 2: -.60990 dB
 507.000 MHz
 3: -1.0816 dB
 416.000 MHz

5 Dec 2002 17:37:20

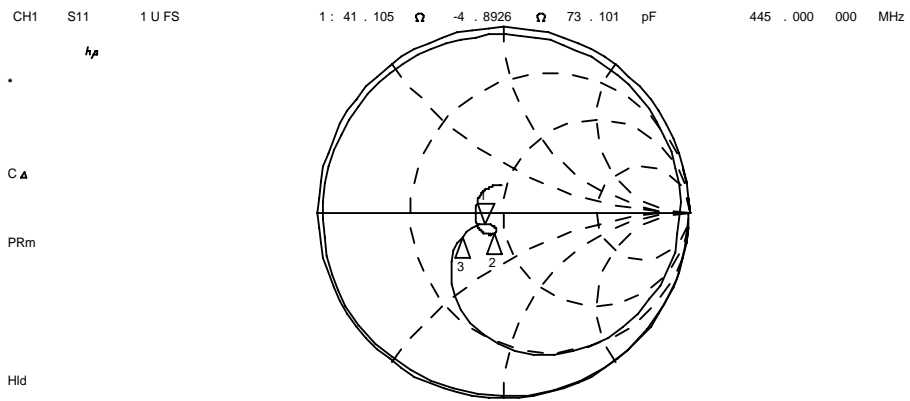

CH1 Markers
 2: 44.094 Ω
 -9.9805 Ω
 507.000 MHz
 3: 31.008 Ω
 -8.4102 Ω
 416.000 MHz



CH2 Markers
 2: 1.2794
 507.000 MHz
 3: 1.6852
 416.000 MHz

