
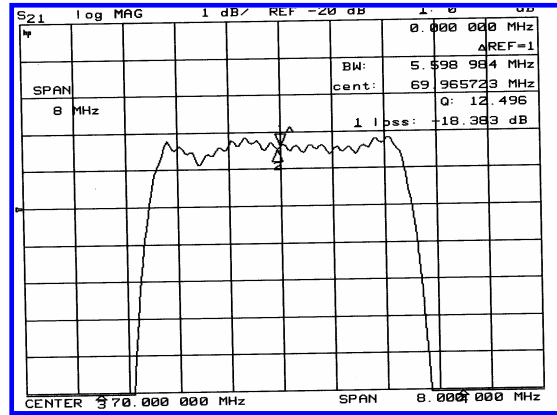



**Typical Performance**

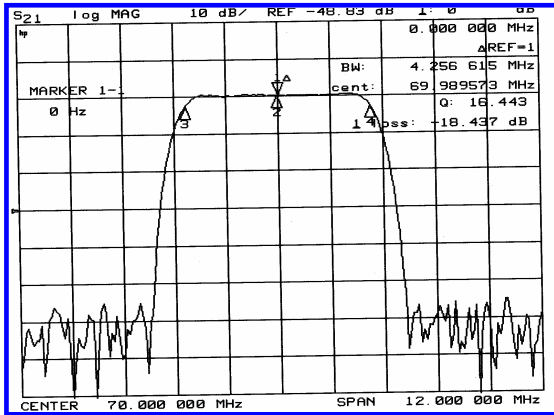


**Specification**

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	Mhz	69.92	70.00	70.08
Insertion Loss	dB	-	18.5	20.0
3dB Bandwidth	Mhz	4.00	4.25	-
40dB Bandwidth	Mhz	-	5.60	6.00
Passband Ripple	dB	-	0.65	1.00
Group Delay Variation	nsec	-	150	200
Absolute Delay	usec	-	2.50	-
Ultimate Attenuation	dB	50	55	-
Substrate Material	-	YZ-LiNbO <sub>3</sub>		

**Package Dimension**

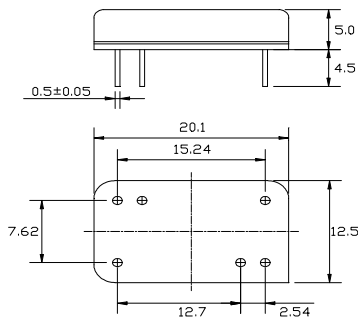

**Matching Configuration**

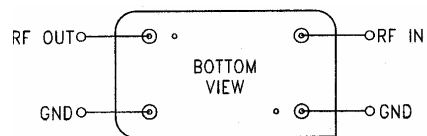

Bottom View  
Source / Load Impedance = 50Ω  
Ambient Temperature = 25°C