
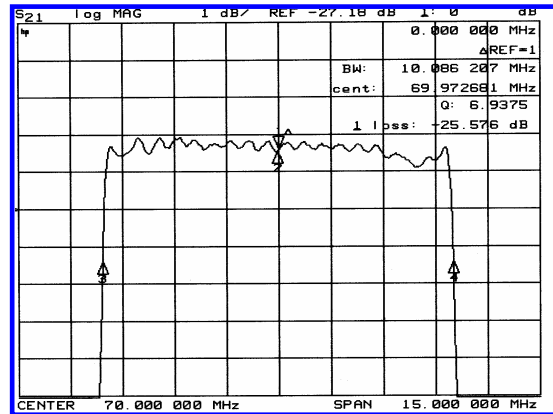



### Typical Performance

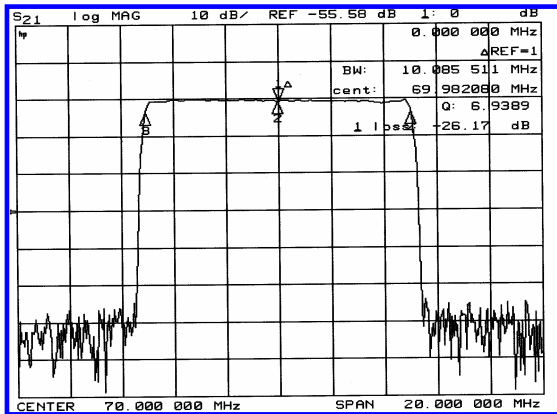


### Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	Mhz	69.92	70.00	70.08
Insertion Loss	dB	-	26.00	27.50
3dB Bandwidth	Mhz	10.00	10.06	-
40dB Bandwidth	Mhz	-	10.75	10.80
Passband Ripple	dB	-	0.95	1.20
Group Delay Variation	nsec	-	100	150
Absolute Delay	µsec	-	4.02	-
Ultimate Attenuation	dB	50	55	-
Substrate Material	-	128-LiNbO <sub>3</sub>		

### Package Dimension

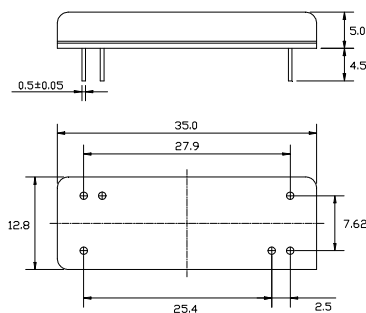

### Matching Configuration



Bottom View  
Source / Load Impedance = 50Ω  
Ambient Temperature = 25°C