
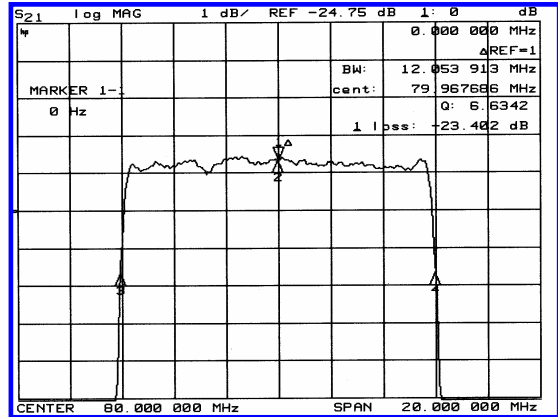



**Typical Performance**

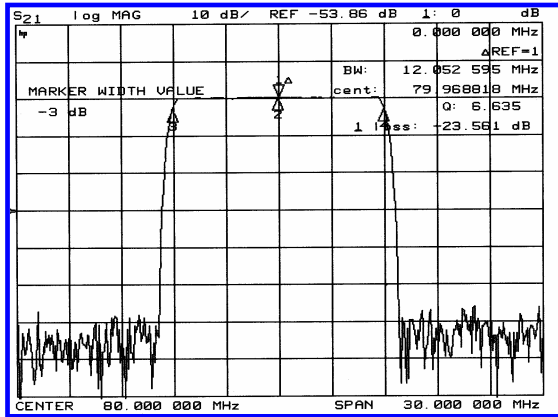


**Specification**

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	Mhz	79.92	80.00	80.08
Insertion Loss	dB	-	23.5	25.0
3dB Bandwidth	Mhz	11.95	12.05	-
40dB Bandwidth	Mhz	-	13.45	13.60
Passband Ripple	dB	-	0.45	0.80
Group Delay Variation	nsec	-	80	150
Absolute Delay	µsec	-	2.25	-
Ultimate Attenuation	dB	50	60	-
Substrate Material	-	128-LiNbO <sub>3</sub>		

**Package Dimension**

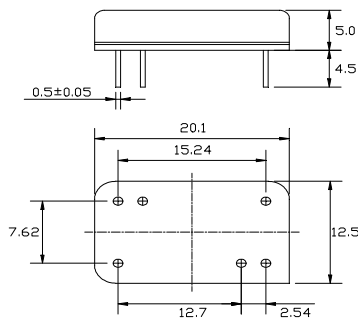

**Matching Configuration**

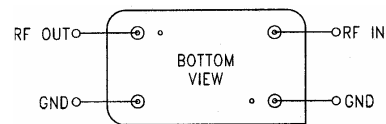

Bottom View  
Source / Load Impedance = 50Ω  
Ambient Temperature = 25°C