
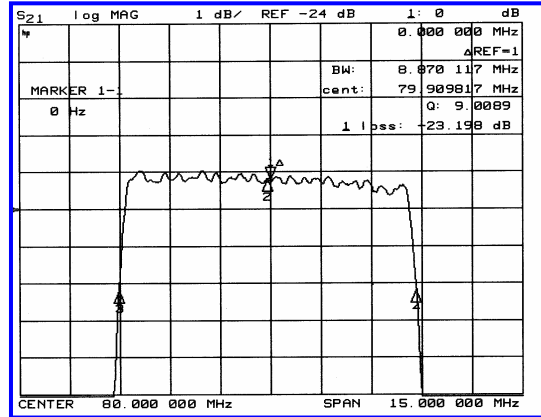



Typical Performance

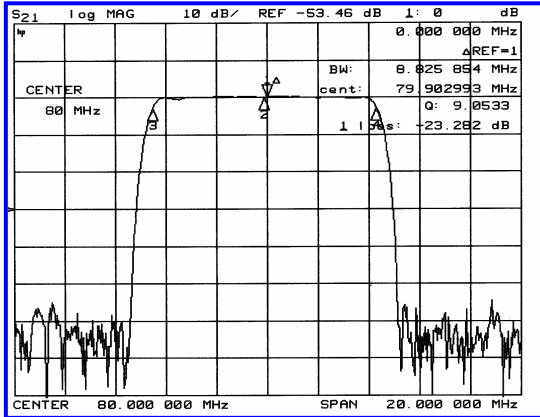


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	Mhz	79.92	80.00	80.08
Insertion Loss	dB		23.0	24.5
3dB Bandwidth	Mhz	8.80	8.85	
40dB Bandwidth	Mhz		10.45	10.60
Passband Ripple	dB		0.65	1.00
Group Delay Variation	nsec		100	200
Absolute Delay	usec		2.30	
Ultimate Attenuation	dB	50	55	
Substrate Material	-		YZ LiNbO <sub>3</sub>	

Package Dimension

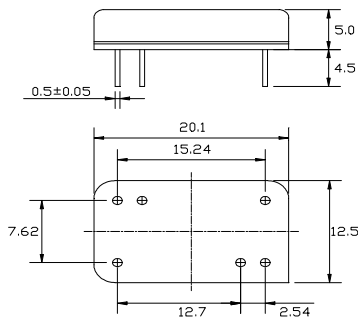

Matching Configuration

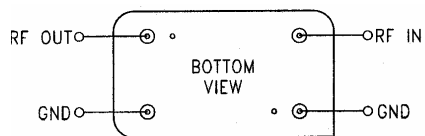

Bottom View  
 Source / Load Impedance = 50Ω  
 Ambient Temperature = 25°C