
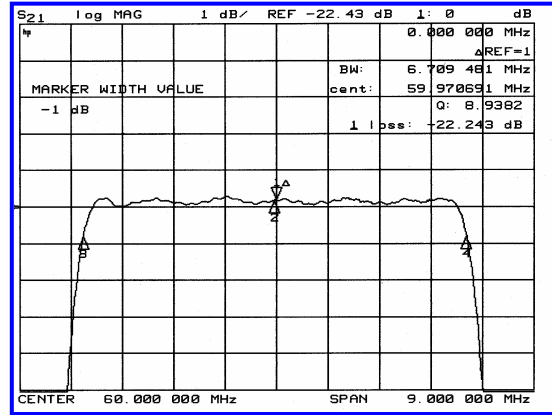



Typical Performance

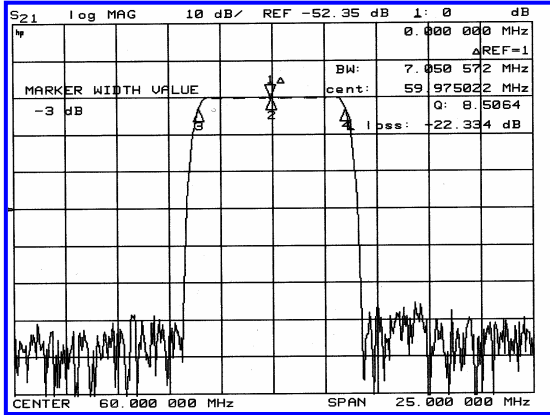


Specification

Parameter	Unit	Min.	Typ.	Max.
Center Frequency	Mhz	59.92	60.00	60.08
Insertion Loss	dB		22.5	24.0
3dB Bandwidth	Mhz	6.90	7.05	
40dB Bandwidth	Mhz		8.35	8.50
Passband Ripple	dB		0.45	0.80
Group Delay Variation	nsec		80	150
Absolute Delay	usec		2.40	
Ultimate Attenuation	dB	50	60	
Substrate Material	-		YZ-LiNbO ₃	

Package Dimension

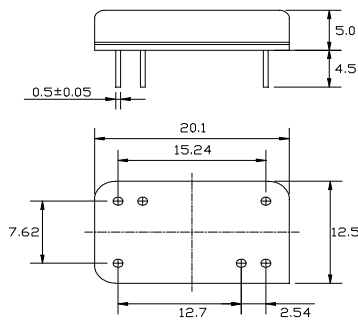

Matching Configuration

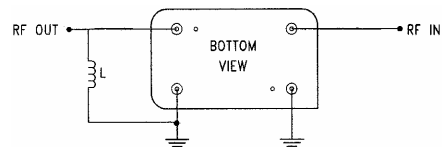

L = 330nH
 Bottom View
 Source / Load Impedance = 50Ω
 Ambient Temperature = 25°C