

1. Scope.

This specification applied to SV1212-2475R10V350M

2. Ratings

	ITEM	SYMBOL	RATING	UNIT
1	Supply Voltage	Vcc	10±0.25	V
2	Tuning Voltage	Vt	2 ~ 9	V
3	Operating Temperature	Top	-40 ~ +85	°C
4	Storage Temperature	Tstg	-50 ~ +100	°C
5	Storage Humidity	Hstg	0 ~ 95%	%

3. Electrical Characteristics


(Over output frequency range, T_A -40 to +85 °C, Vcc=10.0V, Output load 50Ω, Unless otherwise stated).

ITEM	SPEC.			UNIT	Test conditions
	Min	Typ	Max		
Supply Voltage		10		V	DC Voltage
Frequency			2300	MHz	Vcc = 10V, Vt = 2V
	2650				Vcc = 10V, Vt = 9V
Current			35	mA	Vcc = 10V, Vt = 9V
Output Level	2	5	8	dBm	Vcc = 10V, Vt = 2V ~ 9V
Phase Noise (C/N)		97	93	dBc/Hz	10kHz offset, BW = 1Hz
2 nd Harmonic	-10			dBc	Vcc = 10V, Vt = 5.5V
Tuning Sensitivity	50			MHz/V	Vt = 2V ~ 9V
Pulling		<10		MHz	Vcc = 10V, Vt = 5.5V VSWR = 1.5 : 1 All phase
Pushing		< 2		MHz	Vcc = 10V ±0.25V, Vt= 5.5V
Input Capacitance		47		pF	


Testing temperature at 25±5 °C

4. Measurement Circuit


Test Equipment : Agilent E5052A or 4352B

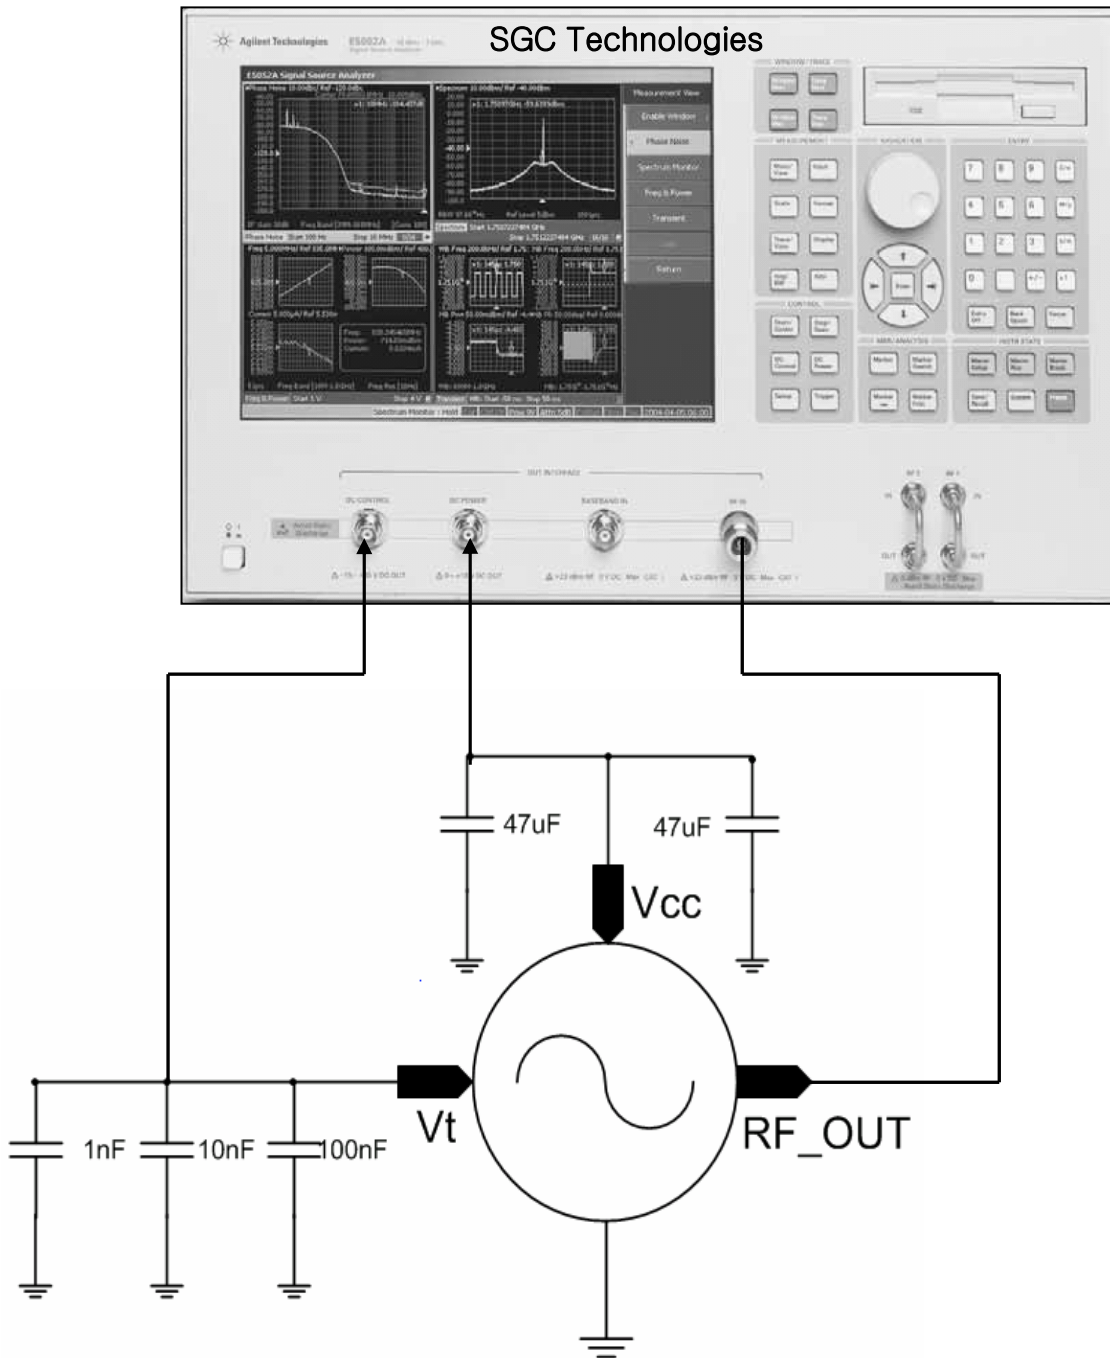


5. Recommendable Reflow Soldering Profile (Pb - Free)

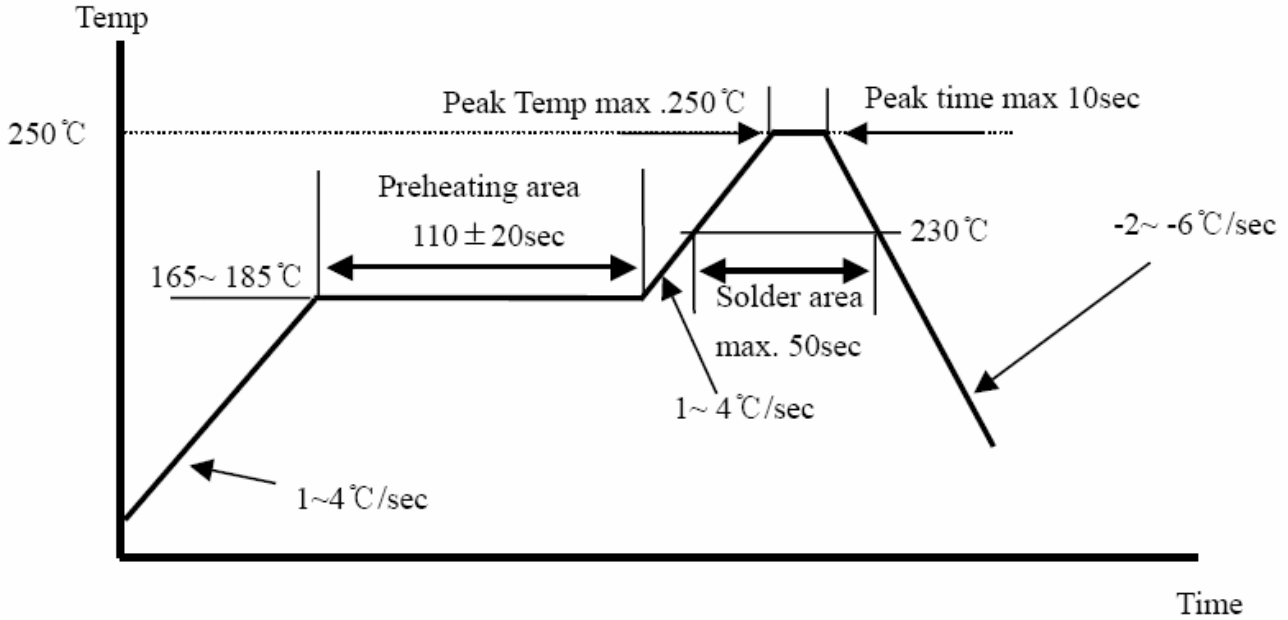


6. Recommendable Reflow Soldering Profile (Sn : Pb = 63:37))

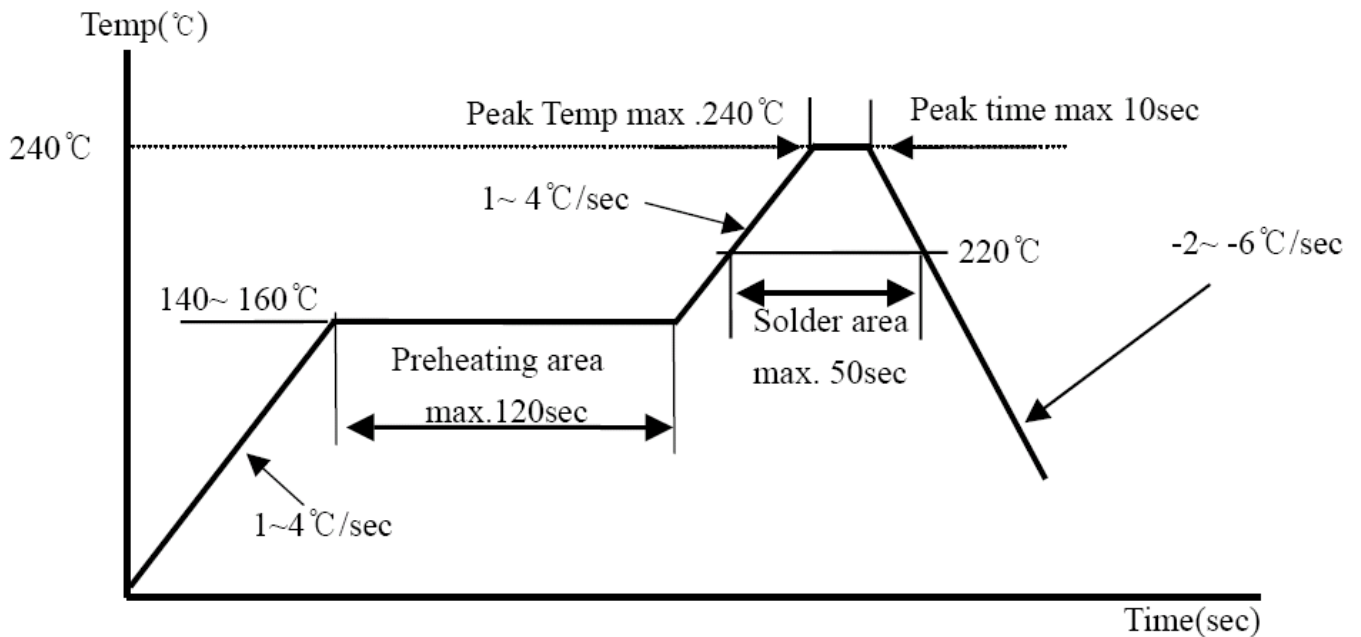

7. Environmental Requirement

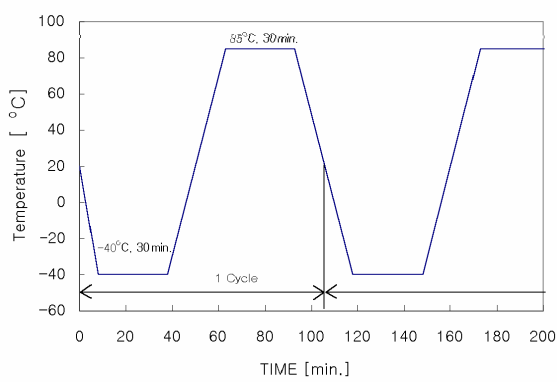No	ITEM	Condition and Method	Evaluation
1	High Temperature Test	Temp. : +85°C ± 2°C Time : 96hrs ± 2hrs When measured after 2 to 24 hours in normal condition	It shall be satisfied electrical requirement, and not be mechanical damage.
2	Low Temperature Test	Temp. : -40°C ± 2°C Time : 96hrs ± 2hrs When measured after 2 to 24 hours in normal condition	
3	High Temperature & High Humidity	Temp. : +60°C ± 2°C Humi. : 90~95%RH Time : 72hrs ± 2hrs When measured after 2 to 24 hours in normal condition	
4	Temperature Cycle	 <p>-40°C 30min., +85°C 30min., 5 Cycle When measured after 2 to 24 hours in normal condition</p>	
5	Vibration Test	Freq. : 10 ~ 30Hz, Amplitude : 1.52mm Freq. : 30~60Hz, 6G Cycle : 20 min. / Cycle Position : Three perpendicular planes.	
6	Shock Test	Height : 75cm Times : 3 Method : Dropped onto wood surface	

8. Mechanical Characteristics

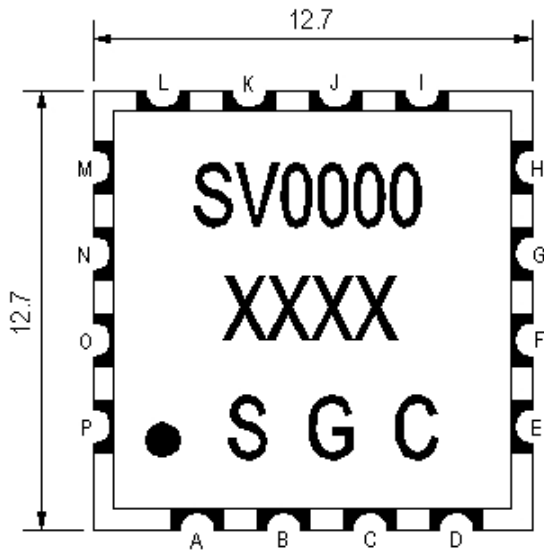

TITLE OF TERMINAL

A, C, D, E, F, G, H, I, K, L, M, O, P : Ground

N : Power Supply

J : Output Power

B : Control Voltage

* Unit : mm

