

1. Scope.

This specification applied to SV1212-61R5V32M

2. Ratings

	ITEM	SYMBOL	RATING	UNIT
1	Supply Voltage	Vcc	5±0.25	V
2	Tuning Voltage	Vt	1.0~10.0	V
3	Operating Temperature	Top	-40 ~ +85	°C
4	Storage Temperature	Tstg	-50 ~ +100	°C
5	Storage Humidity	Hstg	0 ~ 95%	%


3. Electrical Characteristics

(Over output frequency range, T_A -40 to +85°C, Vcc=5.0V, Output load 50Ω, Unless otherwise stated)

PARAMETER	SPEC.			UNIT	Test conditions
	Min	Typ	Max		
Supply Voltage		5		V	DC Voltage
Oscillator Frequency Range			45	MHz	Vcc = 5.0V, Vt = 1.0V
	77				Vcc = 5.0V, Vt = 10.0V
Supply Current			30	mA	Vcc = 5.0V, Vt = 4.5V
Output Power	1.5	5.5	9.5	dBm	Vcc = 5.0V, Vt = 1.0V ~ 10.0V
SSB Phase Noise			110	dBc/Hz	10kHz offset, Vcc=5.0V, Vt = 4.5V
Harmonic Suppression(2 nd)			-2	dBc	Vcc = 5.0V, Vt = 4.5V
Tuning Sensitivity	4			MHz/V	Vt = 1.0V~10.0V
Frequency Pulling		< 5		MHz	Vcc = 5.0V, Vt = 4.5V VSWR = 1.5 : 1 All phase
Frequency Pushing		< 2		MHz	Vcc = 5.0V ±0.25V, Vt= 4.5V
Input Capacitance				pF	

Testing temperature at 25±5°C

4. Mechanical Characteristics

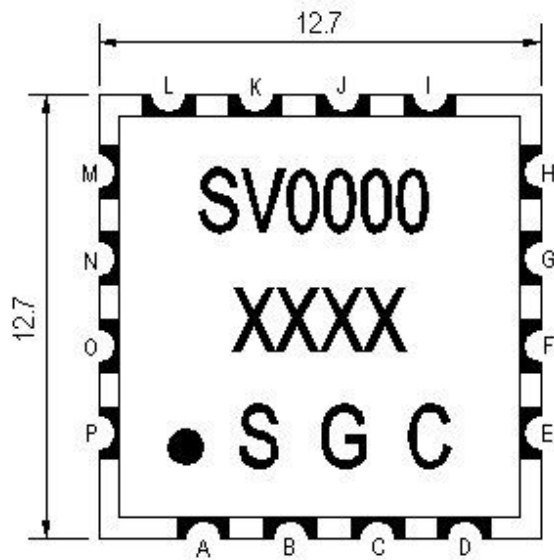

TITLE OF TERMINAL

A,C,D,E,F,G,H,I,K,L,M,O,P : Ground

N : Power Supply

J : Output Power

B : Control Voltage

* Unit : mm

