

1. Scope.

This specification applied to SV1212-3630R8V180M

2. Ratings

	ITEM	SYMBOL	RATING	UNIT
1	Supply Voltage	Vcc	8±0.25	V
2	Tuning Voltage	Vt	0.0~18.0	V
3	Operating Temperature	Top	-40 ~ +85	°C
4	Storage Temperature	Tstg	-50 ~ +100	°C
5	Storage Humidity	Hstg	0 ~ 95%	%


3. Electrical Characteristics

(Over output frequency range, T_A -40 to +85°C, Vcc=8.0V, Output load 50Ω, Unless otherwise stated)

PARAMETER	SPEC.			UNIT	Test conditions
	Min	Typ	Max		
Supply Voltage		8		V	DC Voltage
Oscillator Frequency Range			3540	MHz	Vcc = 5.0V, Vt = 0.0V
	3720				Vcc = 5.0V, Vt = 18.0V
Supply Current			30	mA	Vcc = 5.0V, Vt = 9.0V
Output Power	-3	0	3	dBm	Vcc = 5.0V, Vt = 0.0V ~ 18.0V
SSB Phase Noise			100	dBc/Hz	10kHz offset, Vcc=5.0V, Vt =9.0V
Harmonic Suppression(2 nd)			-10	dBc	Vcc = 5.0V, Vt = 9.0V
Tuning Sensitivity	10			MHz/V	Vt = 0.0V ~ 18.0V
Frequency Pulling		< 5		MHz	Vcc = 5.0V, Vt =9.0V VSWR = 1.5 : 1 All phase
Frequency Pushing		< 2		MHz	Vcc = 5.0V ±0.25V, Vt= 9.0V
Input Capacitance				pF	

Testing temperature at 25±5°C

4. Mechanical Characteristics

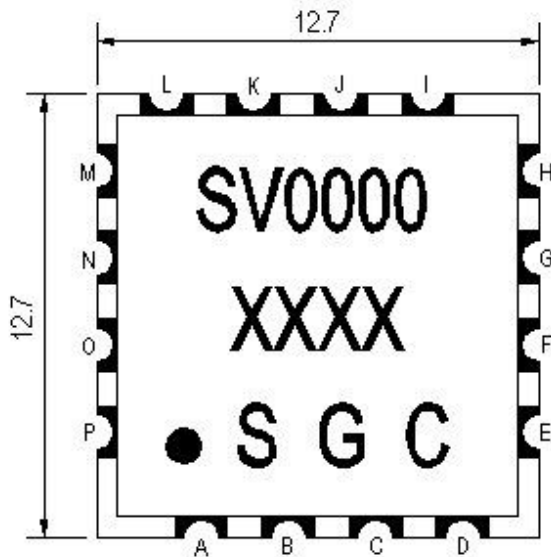

TITLE OF TERMINAL

A,C,D,E,F,G,H,I,K,L,M,O,P : Ground

N : Power Supply

J : Output Power

B : Control Voltage

* Unit : mm

